

スロニン

SPECIFICATIONS

LOA:10.50M

BEAM: 3.00M

DRAFT MAX: 0.95M

DISPLACEMENT: 2,750KG

VINYLESTER VACUUM INFUSE CONSTRUCTION

MIN ENGINE POWER: 2 x 250HP

MAX ENGINE POWER: 2 x 500 HP

CRUISING SPEED (2 x 300HP): 38 KNOTS

MAXIMUM SPEED (2 x 300HP): >63 KNOTS


FUEL TANKS: 2 x 250 LITERS

RANGE: >250 NM

EXTERIOR & INTERIOR DESIGN: AB YACHT DESIGN

NAVAL ARCHITECTURE: GTS MARINE



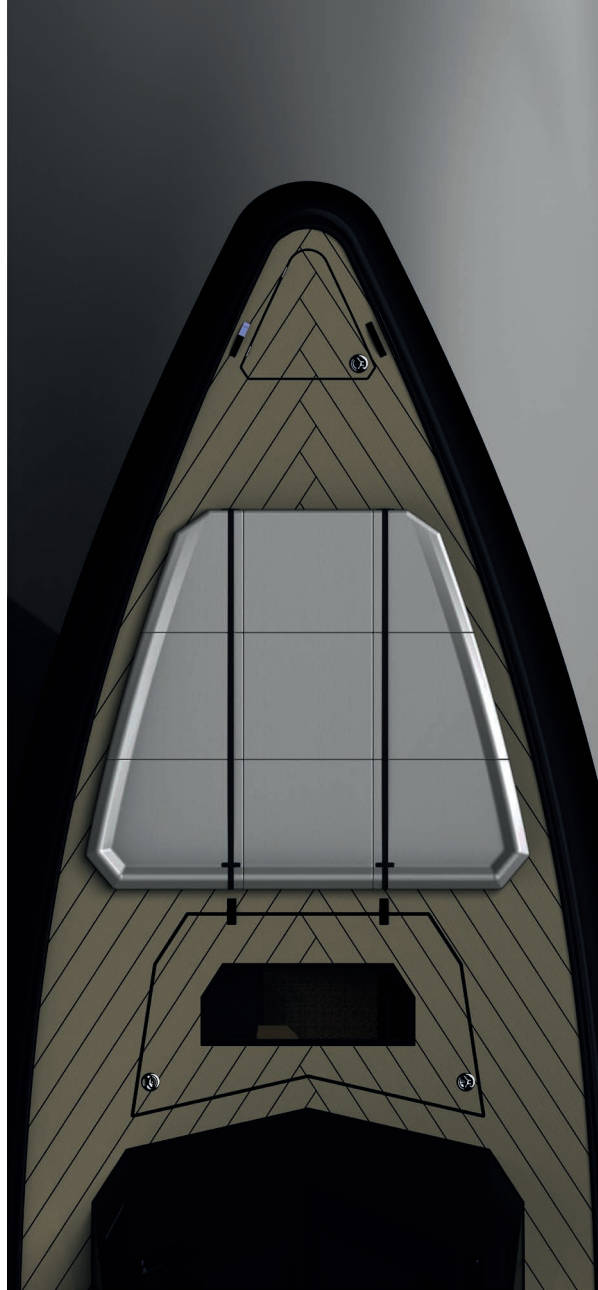

RONIN

DESIGNED BY

AB
YACHT DESIGN & NAVAL ARCHITECTURE



RONIN

DESIGNED BY

AB
YACHT DESIGN & NAVAL ARCHITECTURE



RONIN

DESIGNED BY


AB
YACHT DESIGN & NAVAL ARCHITECTURE



RONIN

DESIGNED BY

AB
YACHT DESIGN & NAVAL ARCHITECTURE

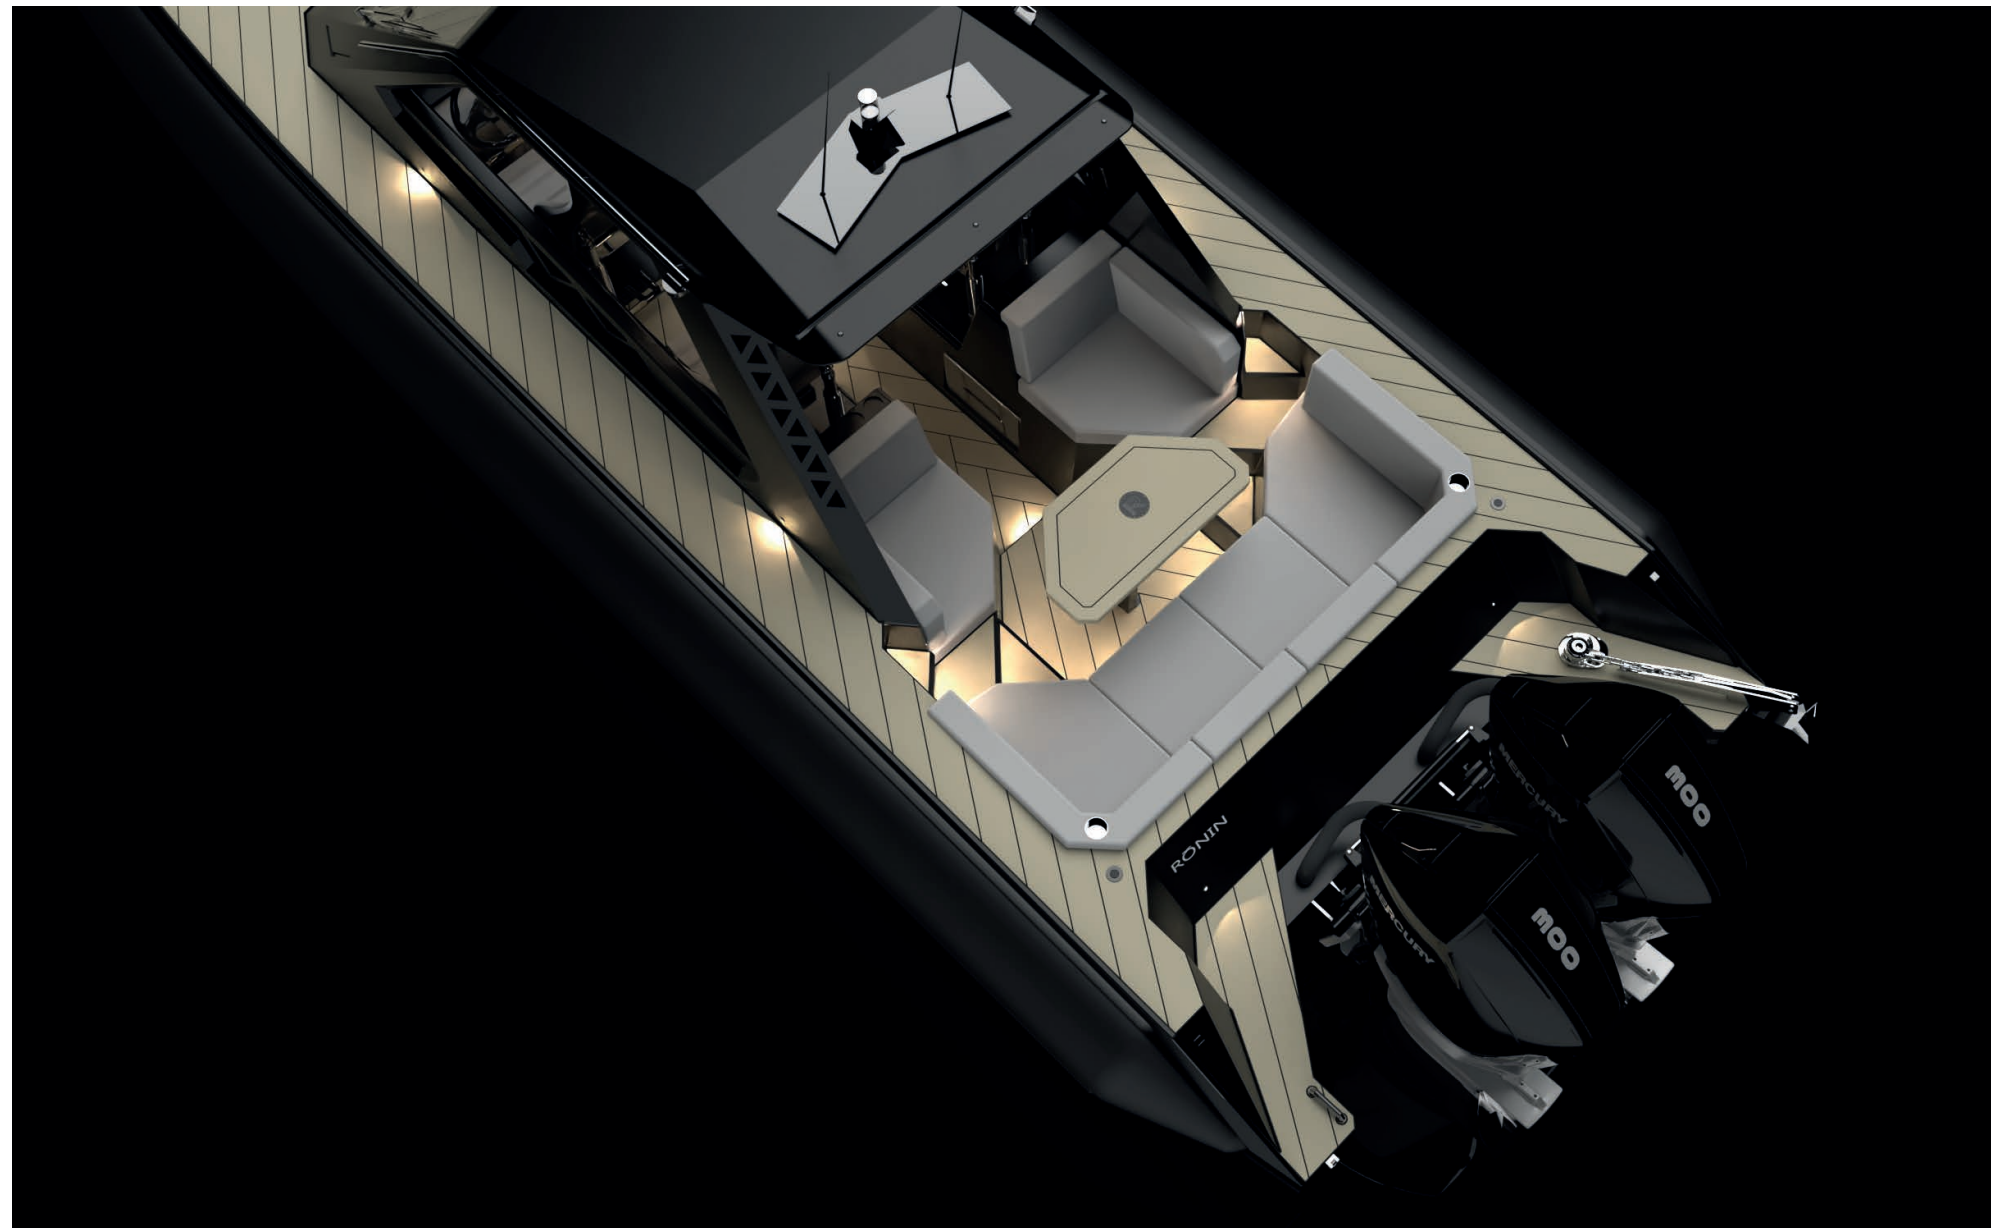

RONIN

DESIGNED BY



AB
YACHT DESIGN & NAVAL ARCHITECTURE



RONIN

DESIGNED BY


AB
YACHT DESIGN & NAVAL ARCHITECTURE

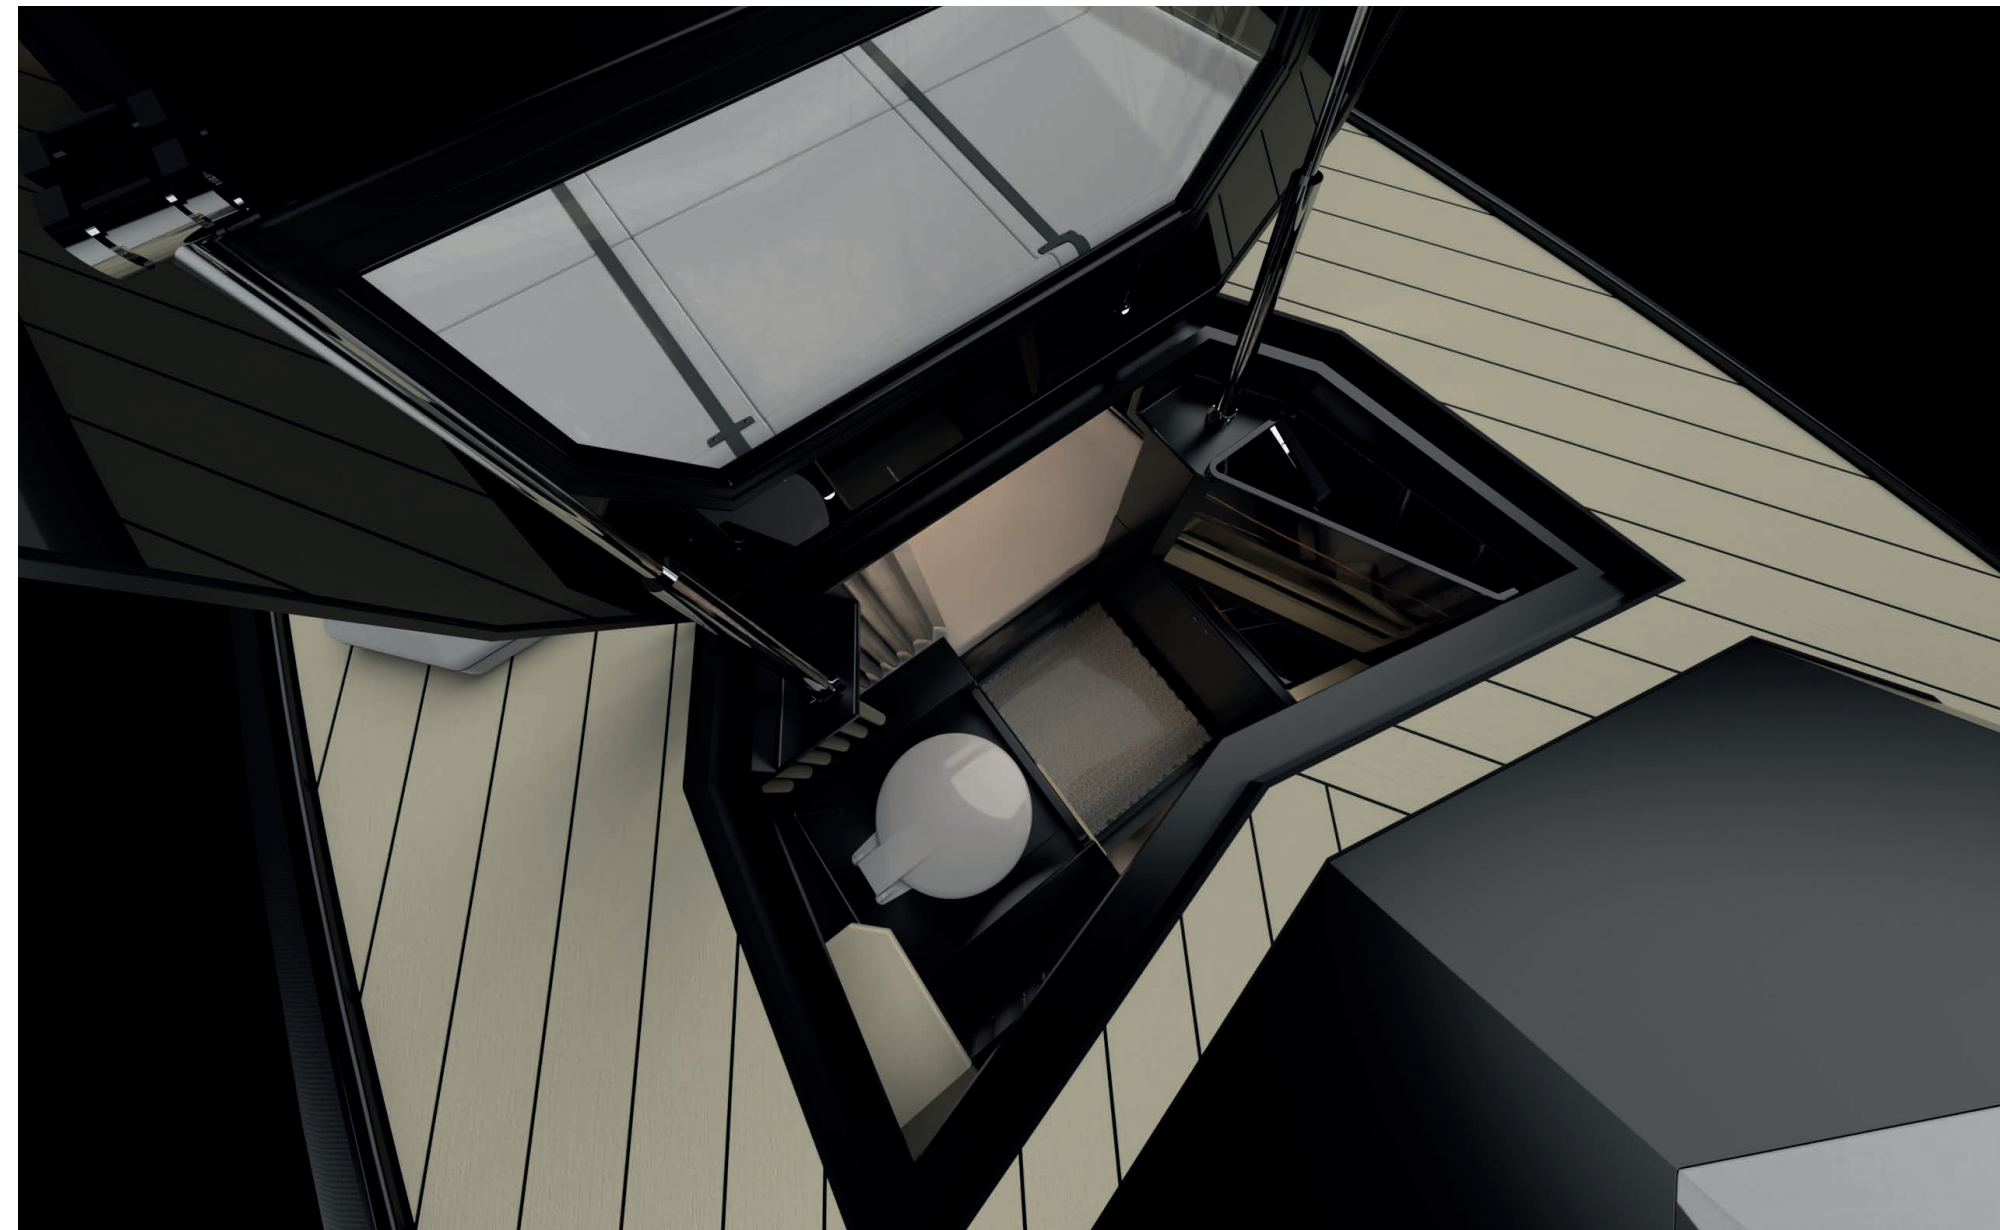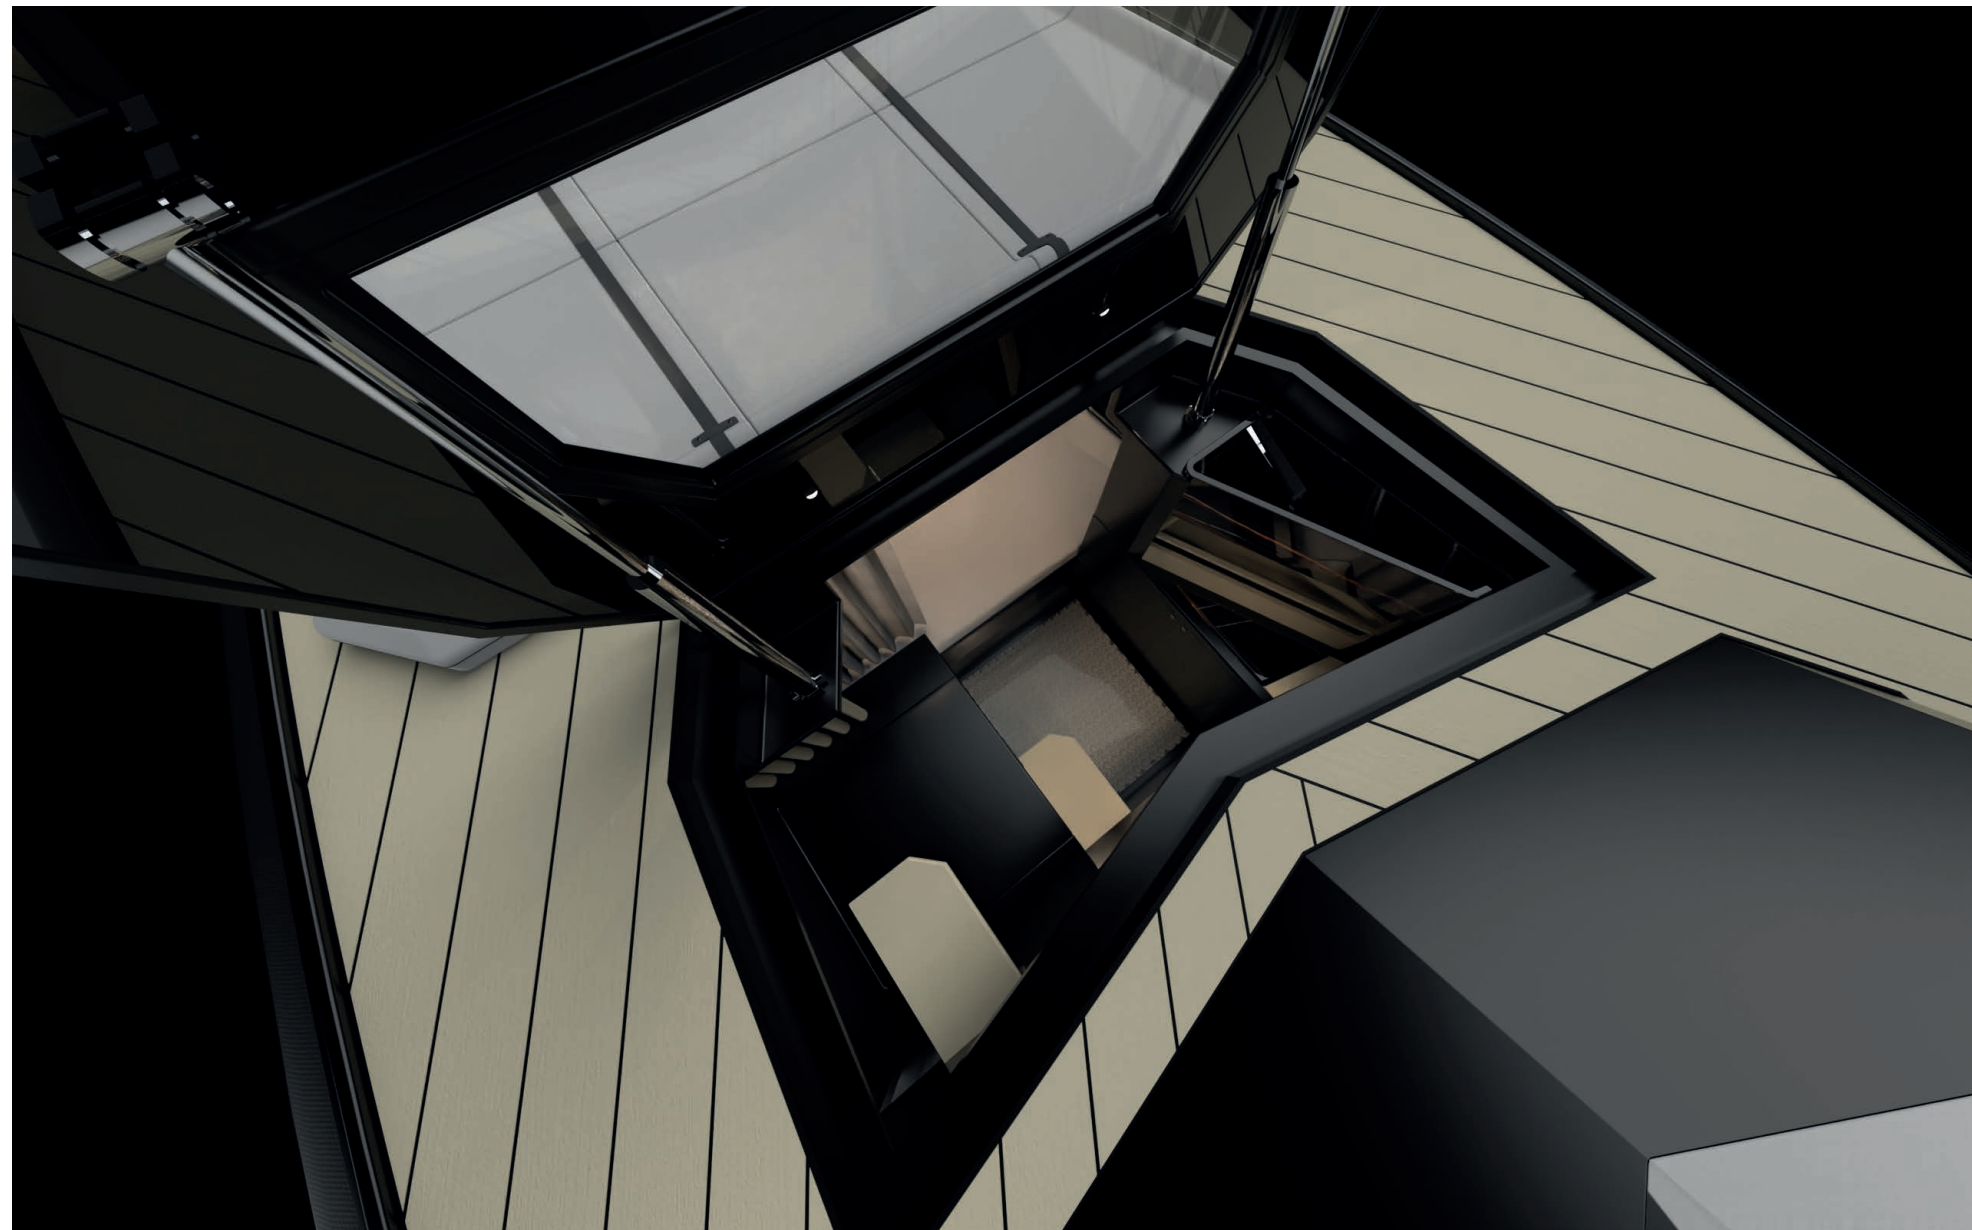

RONIN

DESIGNED BY

AB
YACHT DESIGN & NAVAL ARCHITECTURE

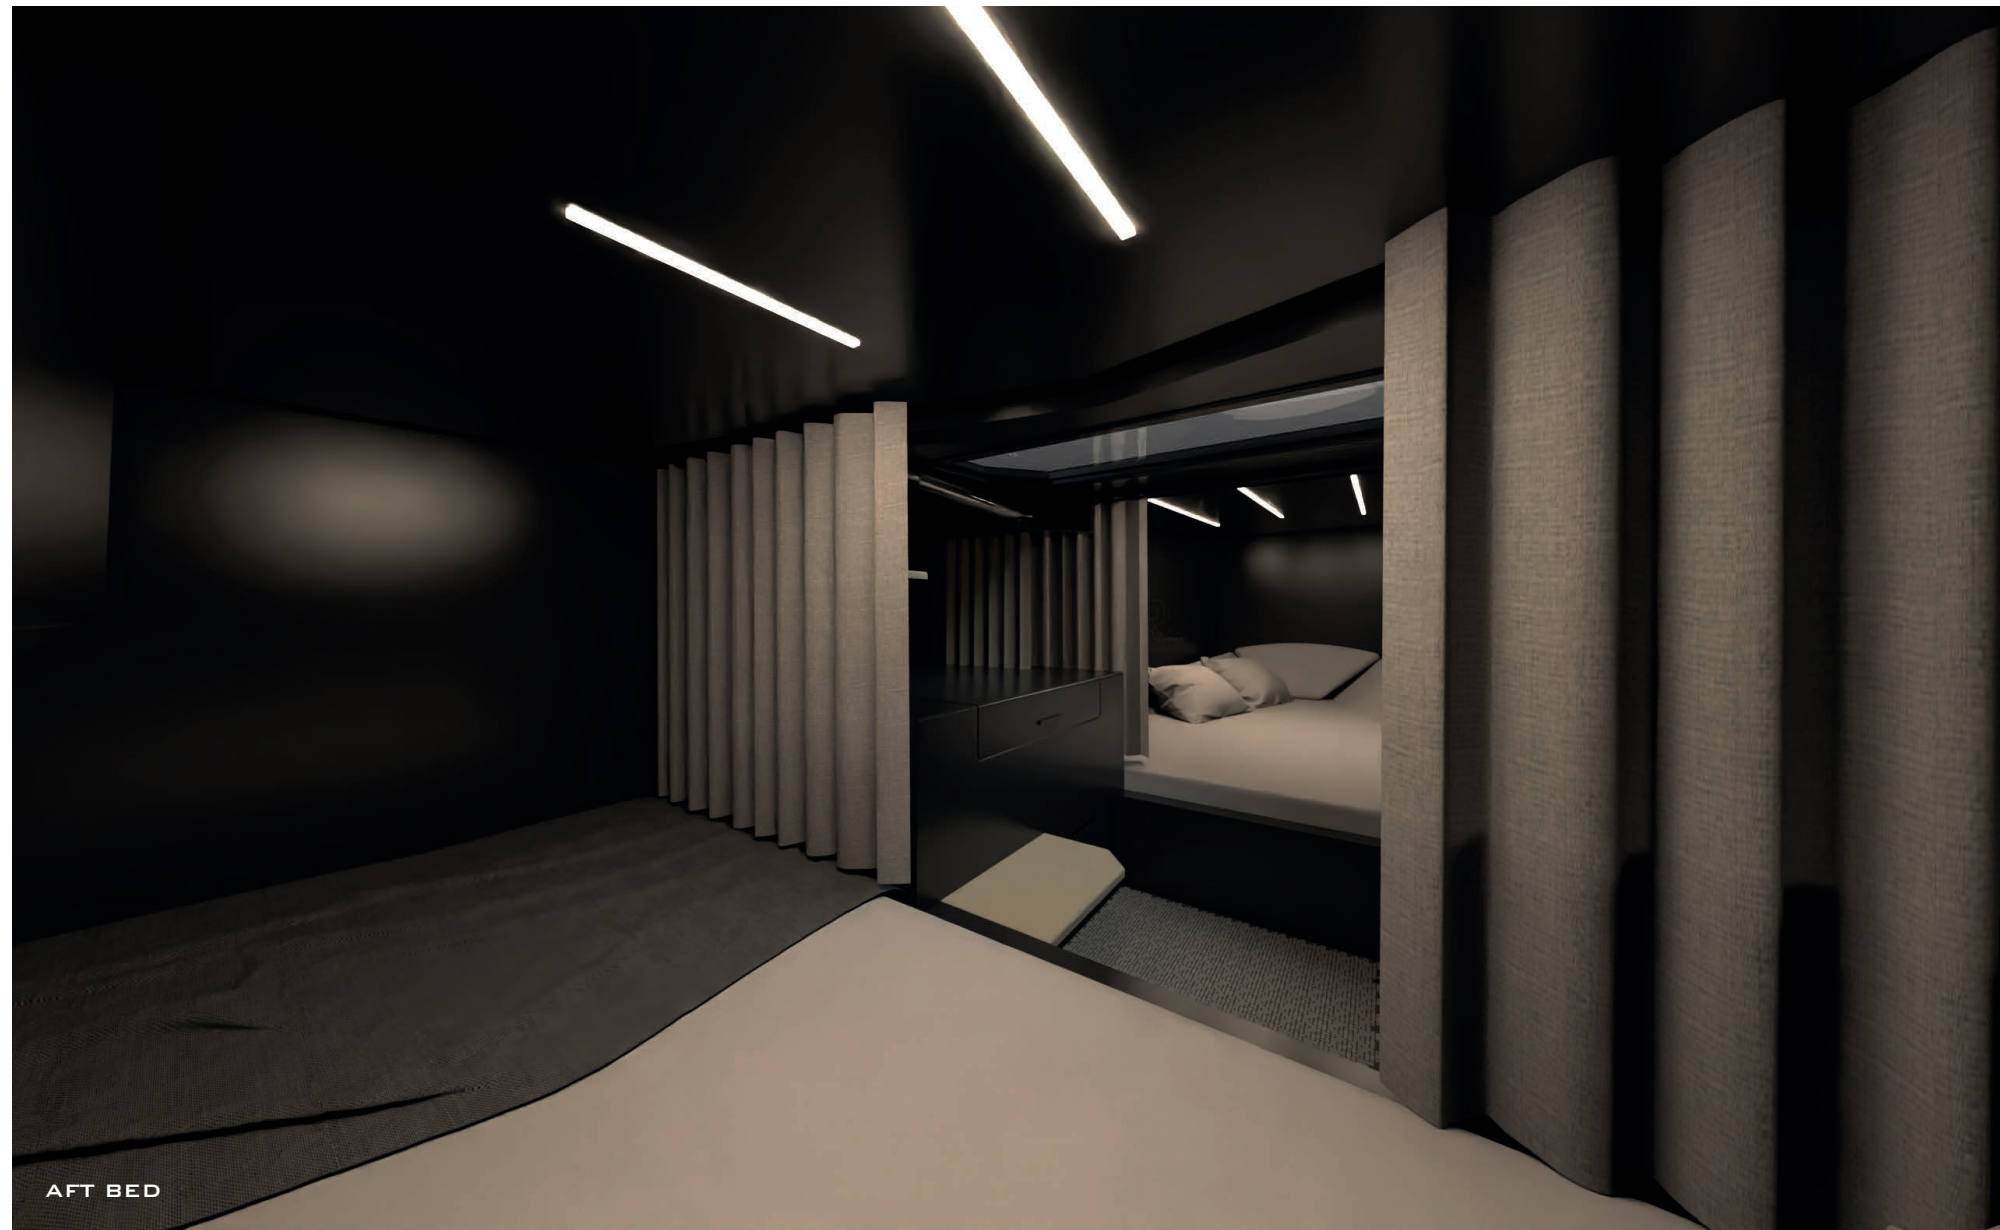

RONIN

DESIGNED BY

AB
YACHT DESIGN & NAVAL ARCHITECTURE



RONIN

DESIGNED BY

AB
YACHT DESIGN & NAVAL ARCHITECTURE



RONIN

DESIGNED BY

AB
YACHT DESIGN & NAVAL ARCHITECTURE



RONIN

DESIGNED BY

AB
YACHT DESIGN & NAVAL ARCHITECTURE



RONIN

DESIGNED BY
AB
YACHT DESIGN & NAVAL ARCHITECTURE

Z
-
Z
O
R